

Thank You for Purchasing DTS-HD Master Audio Suite Software!

Due to the varying software configurations likely to be encountered, it is imperative that you follow the steps outlined below in the correct order for a successful installation of DTS-HD Master Audio Suite for the Windows XP platform.

For proper performance and trouble free installation, the DTS-HD Master Audio Suite requires additional software installations in addition to those that will auto-launch with the supplied installation disc


DO NOT plug the iLok key into a USB port!

Step 1.

- Remove all other iLok and USB based dongles from your computer prior to installation.
- If you are running a beta version (V0.97 or V1.0 beta) of DTS-HD Encoder software, access the **Control Panel** via **Settings** in the **Start menu**. Click on **Add or Remove Programs**, select the appropriate DTS software and click on **Remove**.
- If v1.0 was successfully installed on your machine, Only Step 3 is required to upgrade. (Click **Cancel** at the InterLok Driver Kit installation page)

Step 2. Install Java

If you do not have Java version 5.0 Runtime Environment installed, download version 1.5 from the Java website using this URL: http://www.java.com/en/download/windows_ie.jsp

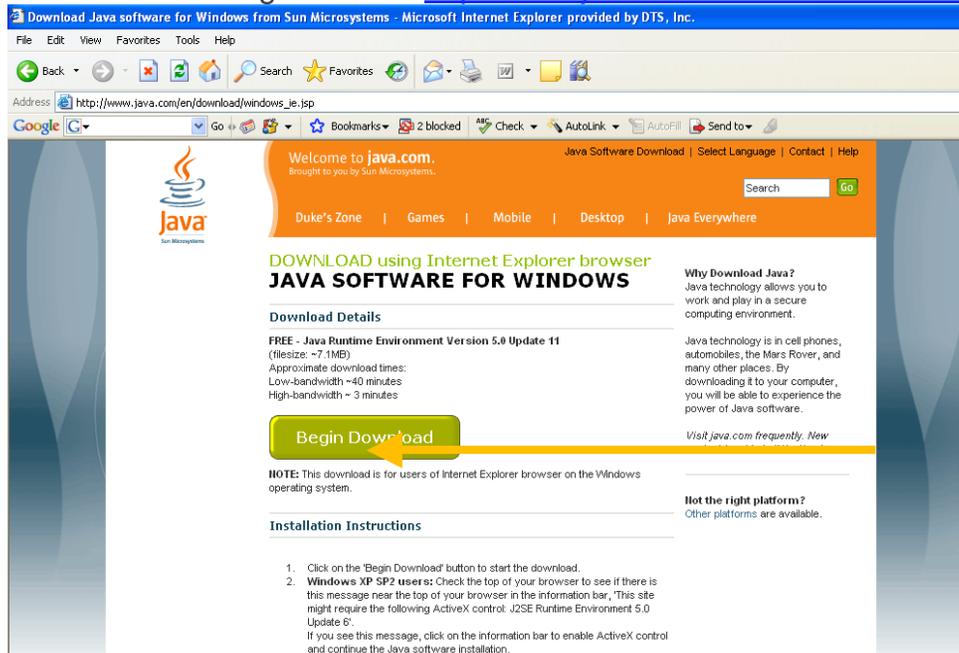

The screenshot shows a Microsoft Internet Explorer browser window displaying the Java website's download page for Windows. The address bar shows the URL: http://www.java.com/en/download/windows_ie.jsp. The page content includes the Java logo, a search bar, and navigation links like 'Duke's Zone', 'Games', 'Mobile', 'Desktop', and 'Java Everywhere'. The main heading is 'DOWNLOAD using Internet Explorer browser JAVA SOFTWARE FOR WINDOWS'. Below this, there are 'Download Details' for 'FREE - Java Runtime Environment Version 5.0 Update 11' (file size ~7.1MB), with approximate download times of ~40 minutes for low-bandwidth and ~3 minutes for high-bandwidth. A prominent green 'Begin Download' button is visible. To the right, there is a section titled 'Why Download Java?' explaining the benefits of Java technology. At the bottom, there are 'Installation Instructions' with a numbered list of steps.

- a. Follow the Installation Instructions given on the website above

Step 3. Insert DTS-HD Master Audio Suite-DTS Surround Audio Suite Installation CD-ROM

The disc will automatically begin the installation process. Click **OK** to the notification, informing you that both Java and iLok drivers need to be installed in order for DTS-HD Master Audio Suite to run properly.



InstallShield Wizard will guide you through the installation process. Click **Finish** when you reach the following screen:




Step 4. The iLok (InterLok) Driver Installation will automatically start




Note: You must not have any iLok or other USB keys connected to your computer ports during the iLok Driver installation process.

DTS-HD Master Audio Suite and DTS Surround Audio Suite both require version **5.3.4.2404** of the iLok driver in order to run properly. If you already have this version installed on your computer, you may skip this step. To check the version of iLok driver currently installed on your system, perform the following steps:

- From the **Start** menu, select **Setting** and open **Control Panel**
- Click on **Add or Remove Programs**
- Select **Interlock Driver Kit** then **Click here for support information** to view version number

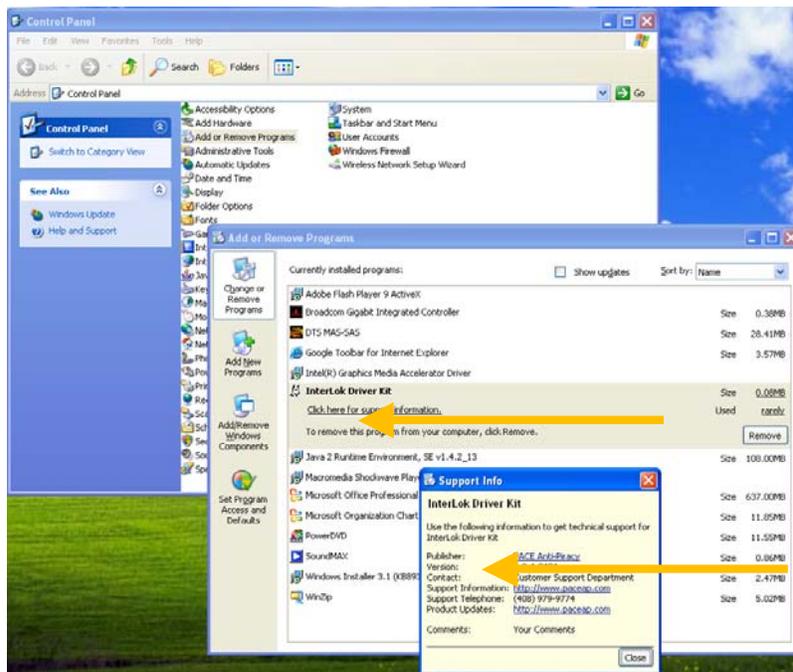

- a. If the proper iLok driver is already installed, you may click **Cancel** at the InterLok Driver Installation page (Step 4) and proceed to step 5 below.
- b. Proceed with the installation until the InstallShield Wizard has completed:

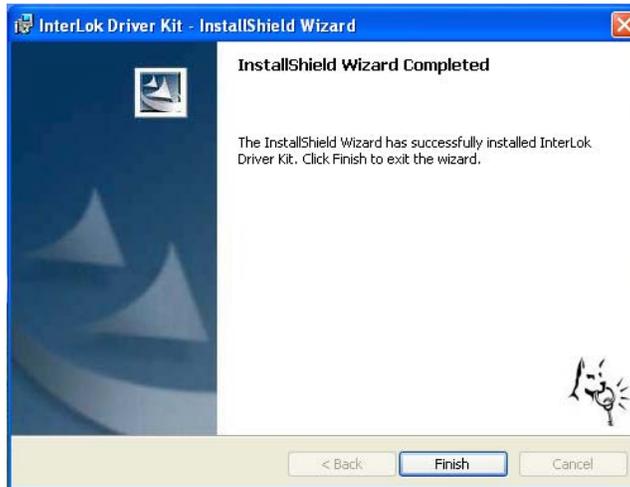

- c. **Restart** the computer.

DO NOT insert the iLok USB key at this time

- d. **Let the computer boot completely.** Once it boots up completely, insert the iLok key into a free USB port.
- e. A message will appear alerting you that new hardware was found.




Click on the message to continue the iLok installation process.

The **Found New Hardware Wizard** will appear.



Click on **“No, not this time”** and then **Next**.

f. Choose **Install Software Automatically** and click **Next** to proceed.

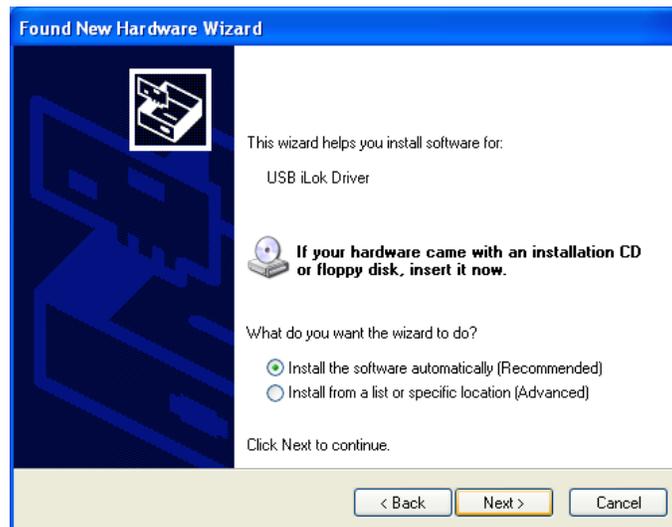

g. The New Hardware Wizard will search for the iLok driver:



- h. When the hardware is found correctly, the New Hardware Wizard process will complete. Click **Finish** to proceed.





- i. The iLok installation is now complete. The following message will appear:



Note: Steps **g** through **j** will repeat each time the iLok is removed from the existing USB port and connected to a different USB port.

Step 5. Error messages on 1st launch

When the DTS-HD Encoder or DTS-HD StreamTools are first launched, a series of **Windows Security Alerts** will appear:

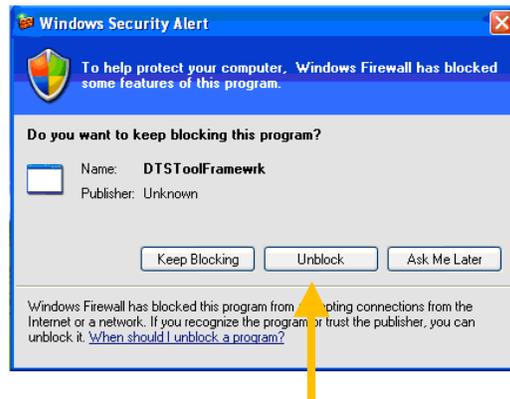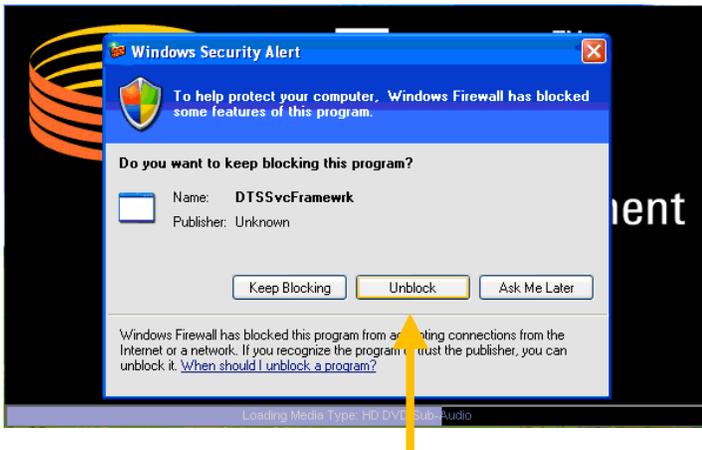

Click **Unblock** when each alert appears.

You are now ready to enjoy DTS-HD Master Audio Suite-DTS Surround Audio Suite!